

# 4CL2-M Chlorine Electrochemical Sensor

(P/N: SEC-4CL2-M)

## Technical Specifications

**Standard  
Warranty**

18 months from date of  
despatch

### MEASUREMENT

<b>Operating Principle</b>	3-electrode electrochemical
<b>Detection Range</b>	0~50 ppm
<b>Maximum Overload</b>	100ppm
<b>Sensitivity</b>	0.40 ± 0.2μA /ppm
<b>Response Time (T90)</b>	≤30 s(Typical 19S)
<b>Repeatability</b>	<±2% signal
<b>Linearity</b>	Linear
<b>Long term output Drift</b>	<2% signal/month

### ELECTRICAL

<b>Resolution</b>	0.1 ppm
<b>Recommended Load</b>	5~30 Ω
<b>Bias Voltage</b>	0mV


### ENVIRONMENTAL

<b>Operating Temp. Range</b>	-20°C ~ 50°C
<b>Operating Humidity Range</b>	15 ~ 90%RH non-condensing
<b>Operating Pressure Range</b>	800 ~ 1200 mbar


### LIFETIME

<b>Recommended Storage Temp.</b>	0°C to +20°C in sealed container
<b>Expected Operating Life</b>	24 months in air
<b>Storage Life</b>	6 months in original packaging

## Product Dimensions



\*DOES NOT INCLUDE THICKNESS OF LABEL ON LABELLED VARIANTS

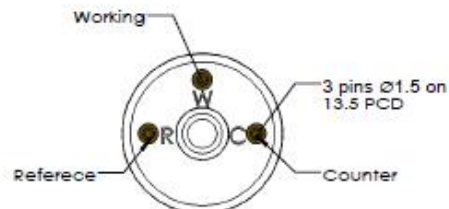

All dimensions in millimeters (± 0.1mm)

# AERI


**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894


[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)

## Temperature Data

### Baseline drift

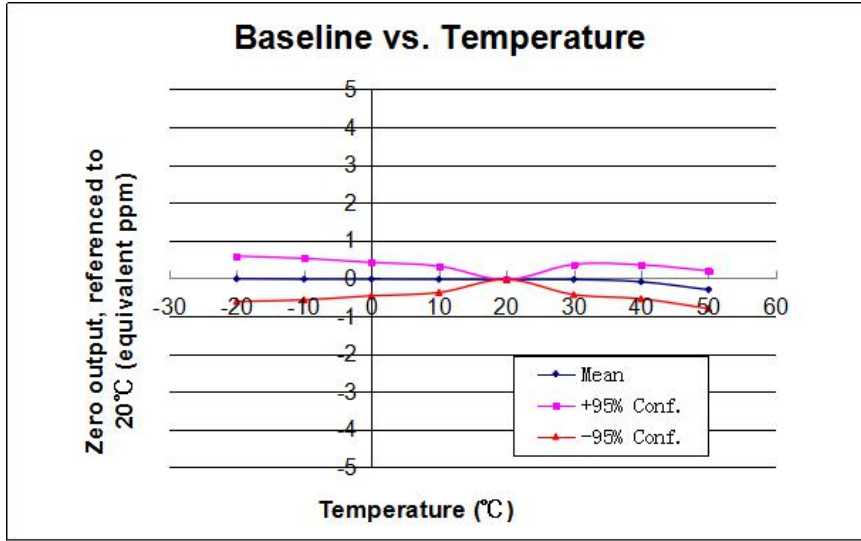

### Sensitivity Temperature Dependence

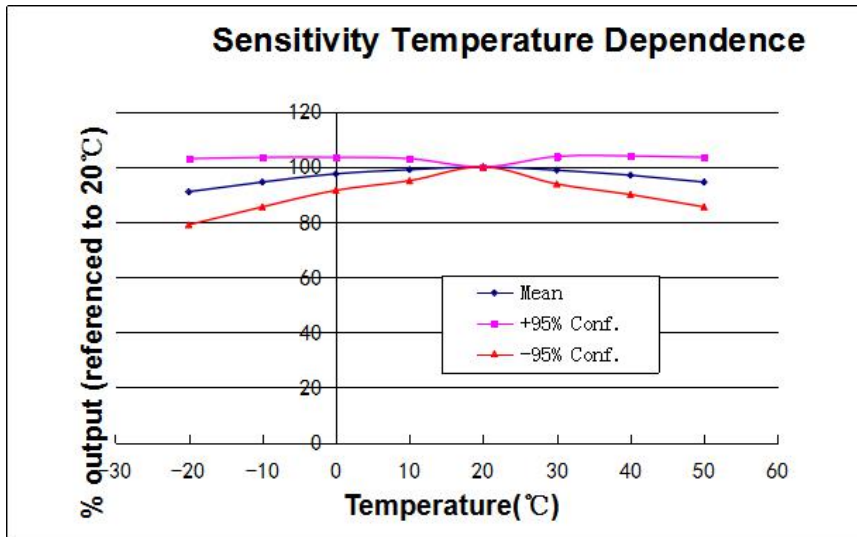

**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894

[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)

## Cross-sensitivity Data

Gas	Concentration (ppm)	Output signal (ppm Cl <sub>2</sub> equivalent)
Sulfur dioxide	10	0
Carbon monoxide	200	0
Nitrogen dioxide	5	6
Hydrogen sulfide	15	-3
Nitric oxide	50	0
Hydrogen	4000	0
Ammonia	100	0
Carbon dioxide	10000	0

Whilst the Gas Sensor are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react. The cross-sensitivity values quoted are based on tests conducted on a small number of sensors. They are intended to indicate sensor response to gases other than the target gas. Sensors may behave differently with changes in ambient conditions and any batch may show significant variation from the values quoted.

### SAFETY NOTE:

Connection should be made via a PCB mounting socket. Soldering to pins will void the sensor's warranty.

It is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments, and operation;

If the Gas Sensor is removed from application circuit, a jumper should be added on 'R' and 'S' pin.

As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own. The data is given for guidance only. It does not constitute a specification or an offer for sale.

# AERI

**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894

[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)