

# 4NO<sub>2</sub>-L Nitrogen Dioxide Electrochemical Sensor

(P/N: SEC-4NO<sub>2</sub>-L)

## Technical Specifications

### MEASUREMENT

<b>Operating Principle</b>	3-electrode electrochemical
<b>Detection Range</b>	0~2000 ppm
<b>Maximum Overload</b>	0.02 ± 0.01 μA /ppm
<b>Sensitivity</b>	≤60 s
<b>Response Time (T90)</b>	<±2% signal
<b>Repeatability</b>	Linear
<b>Linearity</b>	<2% signal/month

### ELECTRICAL

<b>Resolution</b>	5 ppm
<b>Recommended Load</b>	5~30 Ω
<b>Bias Voltage</b>	0mV

### ENVIRONMENTAL

<b>Operating Temp. Range</b>	-20°C ~ 50°C
<b>Operating Humidity Range</b>	15% RH ~ 90% RH non-condensing
<b>Operating Pressure Range</b>	800 ~ 1200 mbar


### LIFETIME

<b>Recommended Storage Temp.</b>	0°C to +20°C in sealed container
<b>Expected Operating Life</b>	24 months in air
<b>Storage Life</b>	6 months in original

**Standard Warranty**

packaging  
18 months from date of despatch

## Product Dimensions

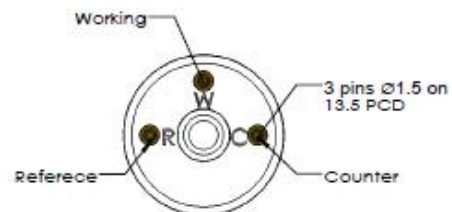

All dimensions in millimeters (± 0.1mm)

# AERI


**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894


[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)

## Temperature Data

### Baseline drift

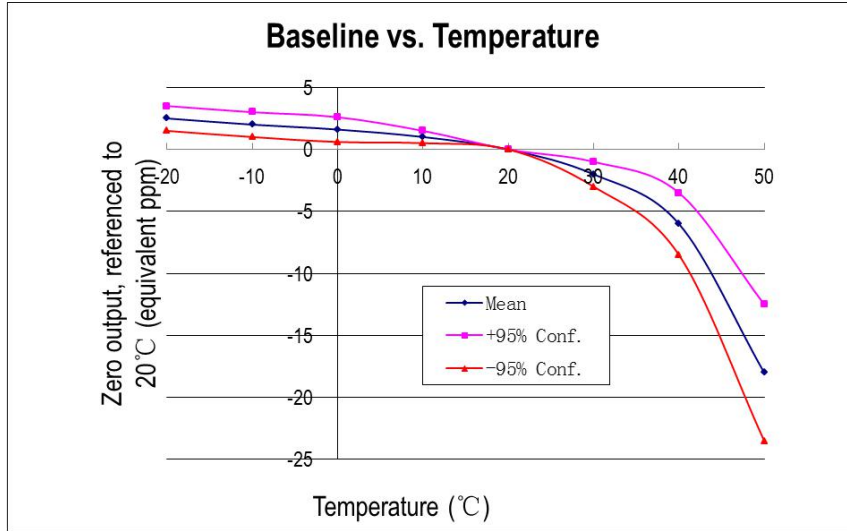

### Sensitivity Temperature Dependence

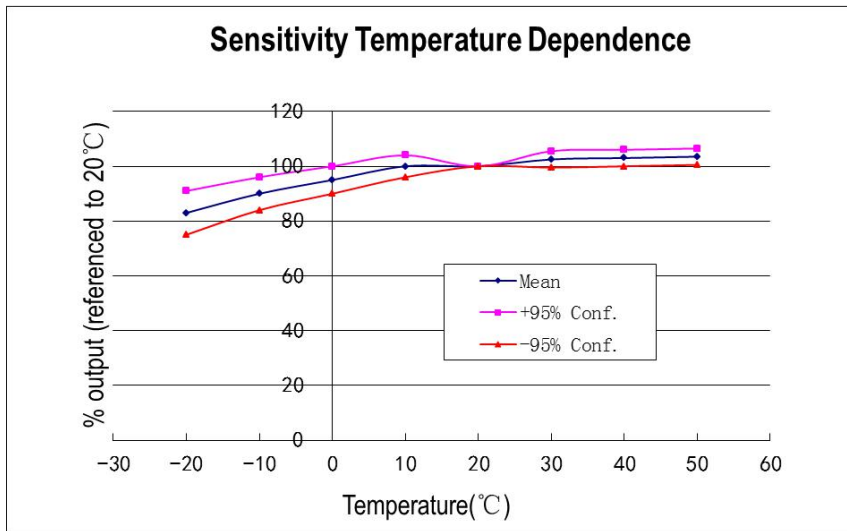

**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894

[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)

## Cross-sensitivity Data

Gas	Concentration (ppm)	Output signal (ppm NO2 equivalent)
Carbon Monoxide	200	0
Nitric Oxide	30	-4
Sulphur Dioxide	5	-5
Hydrogen Sulfide	15	0

Whilst the Gas Sensor are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react. The cross-sensitivity values quoted are based on tests conducted on a small number of sensors. They are intended to indicate sensor response to gases other than the target gas. Sensors may behave differently with changes in ambient conditions and any batch may show significant variation from the values quoted.

### SAFETY NOTE:

Connection should be made via a PCB mounting socket. Soldering to pins will void the sensor's warranty.

It is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments, and operation;

If the Gas Sensor is removed from application circuit, a jumper should be added on 'R' and 'S' pin.

As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own. The data is given for guidance only. It does not constitute a specification or an offer for sale.



**JingZhou Aeritech Co.,Ltd.**

Tel +86 18995851100, Fax +86 0716 8499894

[www.aerisensor.com](http://www.aerisensor.com), E-mail [info@aeritech.cn](mailto:info@aeritech.cn)