

4ETO-S Ethylene Oxide Electrochemical Sensor

(P/N: SEC-4ETO-S)

Technical Specifications

MEASUREMENT

Operating Principle	3-electrode electrochemical
Detection Range	0~10 ppm
Sensitivity	1.9 ± 0.5 μA /ppm
Response Time (T90)	≤120 s
Repeatability	<±2% signal
Linearity	Linear
Long term output Drift	<2% signal/month

ELECTRICAL

Resolution	0.1 ppm
Recommended Load	5~30 Ω
Bias Voltage	+300mV

ENVIRONMENTAL

Operating Temp. Range	-20°C ~ 50°C
Operating Humidity Range	15 ~ 90%RH non-condensing
Operating Pressure Range	800 ~ 1200 mbar


LIFETIME

Recommended Storage Temp.	0°C to +20°C in sealed container
Expected Operating Life	24 months in air
Storage Life	6 months in original


Standard Warranty

packaging
18 months from date of despatch

Product Dimensions



*DOES NOT INCLUDE THICKNESS OF LABEL ON LABELLED VARIANTS

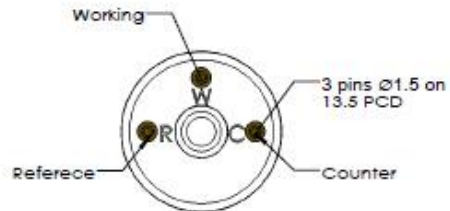

All dimensions in millimeters (± 0.1mm)




JingZhou Aeritech Co.,Ltd.

Tel +86 18995851100, Fax +86 0716 8499894


www.aerisensor.com, E-mail info@aeritech.cn

Temperature Data

Baseline drift

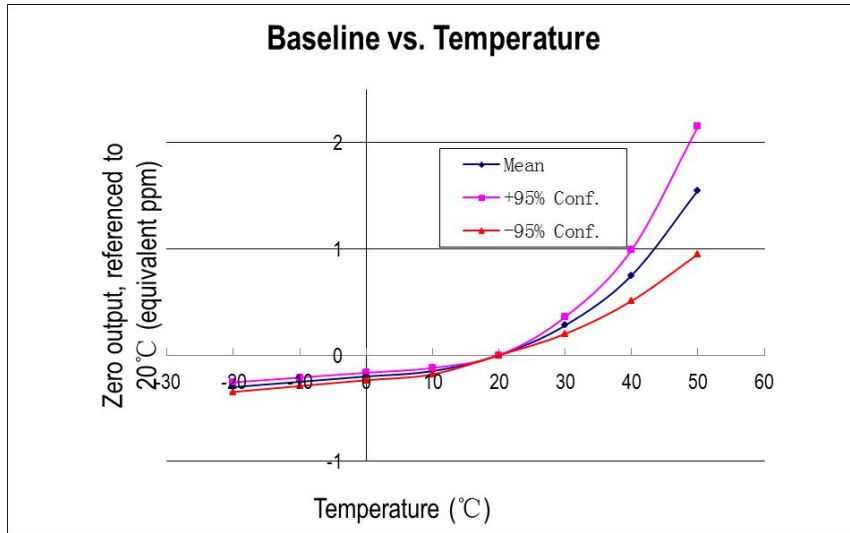

Sensitivity Temperature Dependence

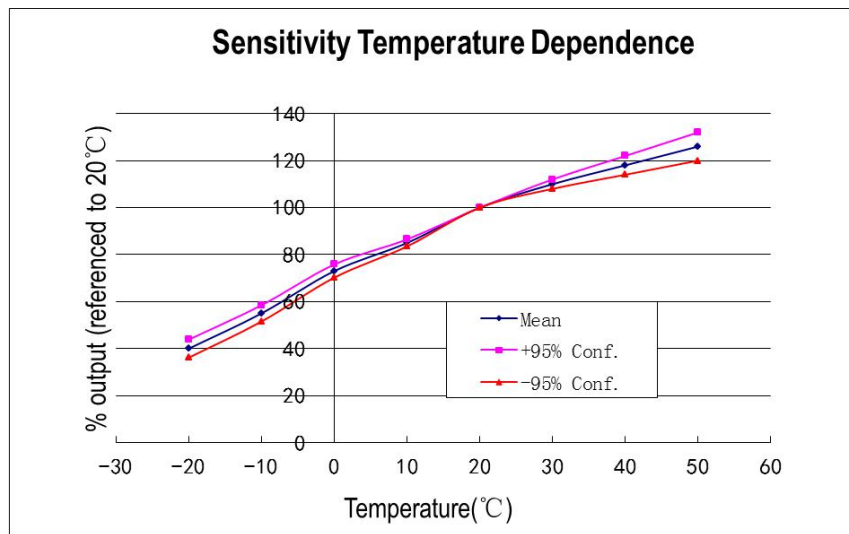

Cross-sensitivity Data

Gas	Formula	Concentration (ppm)	Relative sensitivity to ETO
Ethylene Oxide	CH ₂ CH ₂ O	0~10	1.0
Carbon Monoxide	CO	0~100	0.4
Formaldehyde	HCHO	0~10	2.8
Formic Acid	HCOOH	0~50	0.7
Vinyl Chloride	CH ₂ =CHCl	0~30	0.8
Ethylene	CH ₂ =CH ₂	0~30	1.4
Propene	CH ₃ -CH=CH ₂	0~30	1.2
Butadiene	CH ₂ =CH-CH=CH ₂	0~10	3.6
i-Butylene	(CH ₃) ₂ C=CH ₂	0~ 30	1.1
Ethanol	C ₂ H ₅ OH	0~ 40	1.3
Methanol	CH ₃ OH	0~ 10	3.2
i-Propanol	(CH ₃) ₂ CHOH	0~ 60	0.8
acrylonitrile	CH ₂ CHCN	0~ 100	0.5

(Note: relative sensitivity= Sensitivity of test gas/Sensitivity of ETO)

Whilst the Gas Sensor are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react. The cross-sensitivity values quoted are based on tests conducted on a small number of sensors. They are intended to indicate sensor response to gases other than the target gas. Sensors may behave differently with changes in ambient conditions and any batch may show significant variation from the values quoted.

SAFETY NOTE:

Connection should be made via a PCB mounting socket. Soldering to pins will void the sensor's warranty.

It is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments, and operation;

As applications of use are outside our control, the information provided is given without legal responsibility. Customers should test under their own conditions, to ensure that the sensors are suitable for their own. The data is given for guidance only. It does not constitute a specification or an offer for sale.

AERI

JingZhou Aeritech Co.,Ltd.

Tel +86 18995851100, Fax +86 0716 8499894

www.aerisensor.com, E-mail info@aeritech.cn